



内燃叉车-柴油-C系列2.0-4.5吨
IC FORKLIFT-DIESEL-C SERIES 2.0-4.5T

流线型造型，美观大方，
外观有完全的专利，操纵丝滑。

Streamlined design, elegant
and stylish with unique
patented appearance,
smooth maneuverability.

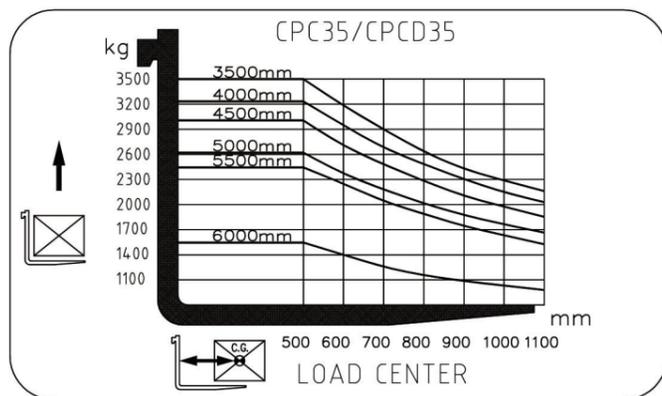


Model 型号		CPCD20	CPCD25	CPCD30	CPCD35	CPCD40	CPCD45		
CHARACTERISTICS 特性	POWER 动力形式	柴油 DIESEL							
	CAPACITY 额定负载	kg	2000	2500	3000	3500	4000	4500	
	LOAD CENTER 载荷中心	mm	500	500	500	500	500	500	
	LIFT HEIGHT 起升高度	h	mm	3000	3000	3000	3000	3000	
	MAST TILT ANGLE 门架倾斜角度	F/R 前/后	Deg	6/12	6/12	6/12	6/12	6/12	
	MIN. TURNING RADIUS 最小转弯半径	Wa	mm	2410	2410	2450	2450	2850	
	OVERHEAD GUARD HEIGHT 护顶架高度		mm	2150	2150	2165	2165	2165	
	FRONT LOAD DISTANCE 前载距离		mm	450	450	490	490	495	
	PERFORMANCE 性能	MAX. TRAVELING SPEED 最大行驶速度	LOAD/NO LOAD 满载/空载	km/h	18/19	18/19	18/19	18/19	17/18
MAX. LIFTING SPEED 最大起升速度		LOAD/NO LOAD 满载/空载	mm/s	475/500	475/500	455/480	455/480	425/450	
MAX. GRADEABILITY 最大爬坡能力		LOAD/NO LOAD 满载/空载	%	20/21	20/21	20/21	19/20	18/19	
DIMENSIONS 尺寸	TOTAL LENGTH 全长	WITH FORK 有货叉	L1+L2	mm	3750	3750	3770	3770	4055
		WITHOUT FORK 无货叉	L2	mm	2680	2680	2700	2700	2985
	TOTAL WIDTH 全宽		b	mm	1160	1160	1225	1225	1360
	MAX. HEIGHT 货叉架最大起升时高度	BACKREST 挡货架	h4	mm	4245	4245	4265	4265	4315
MAST HEIGHT 门架落地高度		h1	mm	2085	2085	2100	2100	2195	
CHASSIS 底盘	TYRE 轮胎	FRONT 前轮			7.00-12-12PR	7.00-12-12PR	28x9-15-12PR	28x9-15-12PR	250-15-20PR
		REAR 后轮			6.00-9-10PR	6.00-9-10PR	6.50-10-10PR	6.50-10-10PR	7.00-12-12PR
	WHEELBASE 轴距		L3	mm	1700	1700	1700	1700	1860
	WHEELTREAD 轮距	F/R 前/后		mm	970/970	970/970	970/970	1000/970	1154/1100
SERVICE WEIGHT 自重	NO LOAD 无载荷		Kg	3600	3850	4300	4600	5100	
POWER 驱动	BATTERY 电池	VOLTAGE/CAPACITY 电压/容量		V/Ah	12/80	12/80	12/80	12/80	12/80
		MODEL 型号			ISUZU C240				
		RATED POWER 额定功率		kw/r.p.m	35.4/2500	35.4/2500	35.4/2500	35.4/2500	46.0/2450
		RATED TORQUE 额定转矩		Nm/r.p.m	138/1800	138/1800	138/1800	138/1800	186/1800
CYLINDERS 油缸数				4	4	4	4	4	

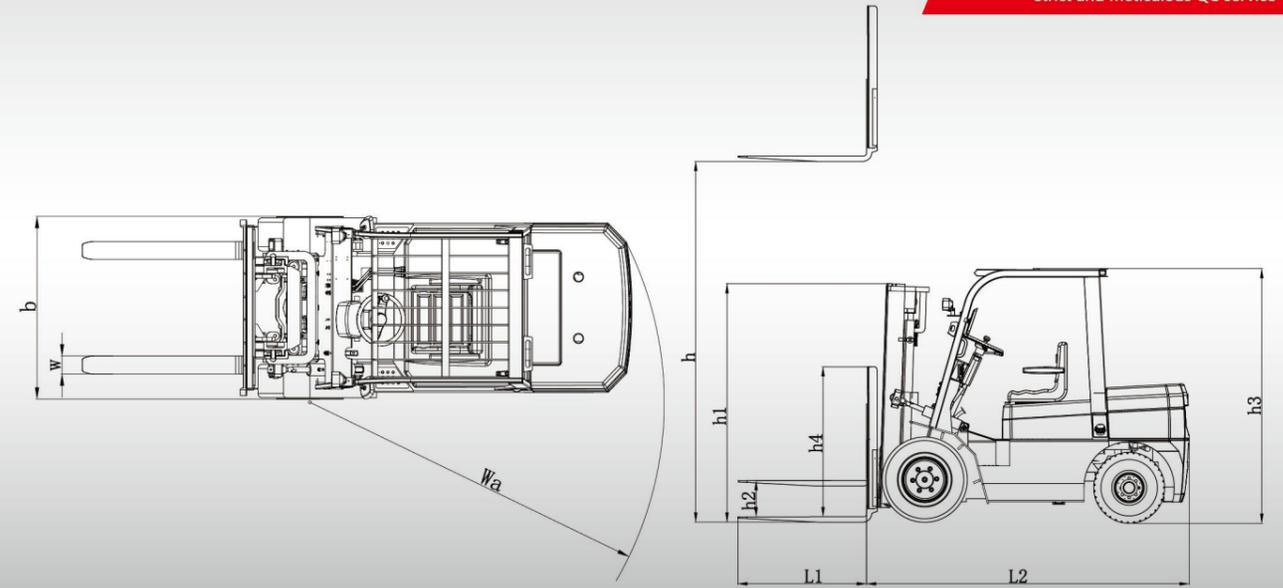


内燃叉车-柴油-K系列1.5-4.0吨
IC FORKLIFT-DIESEL-K SERIES 1.5-4.0T

外形简洁、大方美观，
严格的环保设计。

Sleek, elegant, and designed
with strict environmental
standards.

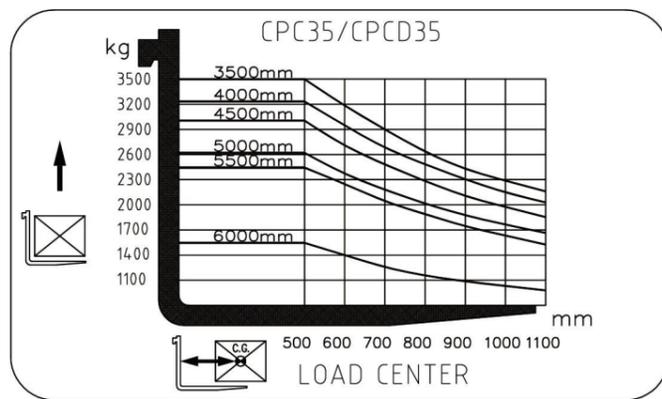

		Model 型号				CPCD15	CPCD20	CPCD25	CPCD30	CPCD30H	CPCD35	CPCD40
CHARACTERISTIC 特性	POWER动力形式			units 单位	DIESEL 柴油							
	CAPACITY额定负载			kg 千克	1500	2000	2500	3000	3300	3500	4000	
	LOAD CENTER载荷中心			mm 毫米	500	500	500	500	500	500	500	
	LIFT HEIGHT起升高度			h mm毫米	3000	3000	3000	3000	3000	3000	3000	
	MAST TILT ANGLE 门架倾斜角度	F/R		Deg 度	6/12	6/12	6/12	6/12	6/12	6/12	6/12	
	MIN. TURNING RADIUS 最小转弯半径		Wa	mm毫米	2060	2190	2240	2400	2470	2470	2580	
	OVERHEAD GUARD HEIGHT 护顶架高度			mm毫米	2100	2150	2150	2165	2165	2165	2180	
	FRONT LOAD DISTANCE 前载距离			mm毫米	410	450	450	490	490	490	490	
PERFORMANCE 性能	MAX. TRAVELING SPEED 最大行驶速度	LOAD/NO LOAD 满载/空载		km/h 千米/小时	17/18	18/19	18/19	18/19	18/19	18/19	18/19	
	MAX. LIFTING SPEED 最大起升速度	LOAD/NO LOAD 满载/空载		mm/s 毫米/秒	550/600	480/500	480/500	450/480	450/480	450/480	420/450	
	MAX. GRADEABILITY 最大爬坡能力	LOAD/NO LOAD 满载/空载		%	20/21	20/21	20/21	20/21	19/20	18/19	18/19	
DIMENSIONS 尺寸	TOTAL LENGTH 全长	WITH FORK有货叉	L1+L2	mm 毫米	3340	3600	3650	3770	3870	3870	3970	
		WITHOUT FORK无货叉	L2	mm 毫米	2270	2530	2580	2700	2800	2800	2900	
	TOTAL WIDTH 全宽		b	mm 毫米	1080	1160	1160	1225	1225	1225	1250	
	MAX. HEIGHT 货叉最大起升时高度		h4	mm 毫米	3930	4220	4220	4265	4265	4265	4275	
MAST HEIGHT 门架落地高度		h	mm 毫米	2000	2100	2100	2115	2115	2115	2195		
CHASSIS 底盘	TYRE 轮胎	FRONT 前轮			6.50-10	7.00-12	7.00-12	28x9-15	28x9-15	28x9-15	250-15	
		REAR 后轮			5.00-8	6.00-9	6.00-9	6.50-10	6.50-10	6.50-10	6.50-10	
	WHEELBASE 轴距		L3	mm 毫米	1400	1600	1600	1700	1800	1800	1900	
	WHEELTREAD 前轮距/后轮距	F/R		mm 毫米	890/920	970/970	970/970	1000/970	1000/970	1000/970	1000/970	
SERVICE WEIGHT 自重	NO LOAD无载荷		kg 千克	2760	3530	3850	4350	4300	4605	4605		
POWER 驱动	ENGINE 引擎	MODEL 型号			NC485	C490BPG	C490BPG	C490BPG	C490BPG	C490BPG	A498BPG	
		RATED POWER 额定功率		kw/r.p.m 千瓦/转	32/2600	40/2650	40/2650	40/2650	40/2650	40/2650	45/2500	
		RATED TORQUE 额定转矩		Nm/r.p.m 牛米/转	135/1600-1800	162/1800	162/1800	162/1800	162/1800	162/1800	193/1600	
		CYLINDERS 油缸数			4	4	4	4	4	4	4	

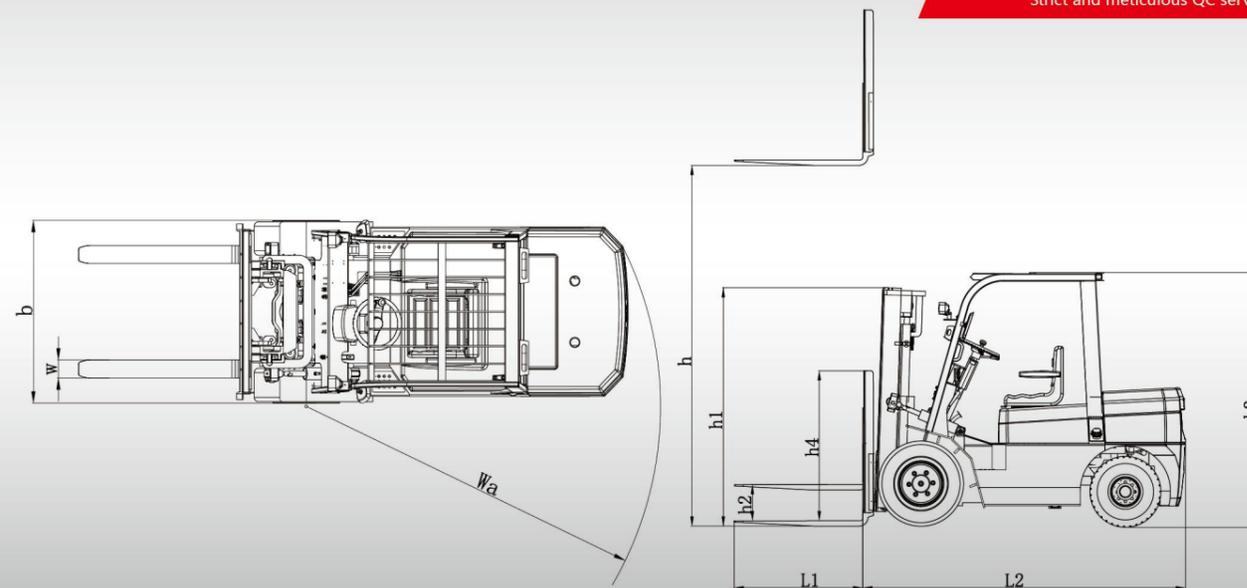


内燃叉车-柴油-K系列4.5-10吨


IC FORKLIFT-DIESEL-K SERIES 4.5-10T

先进的制造工艺，
优质的零部件确保整车可靠性。

Advanced manufacturing
process and high-quality
components ensure the
reliability of the entire vehicle.

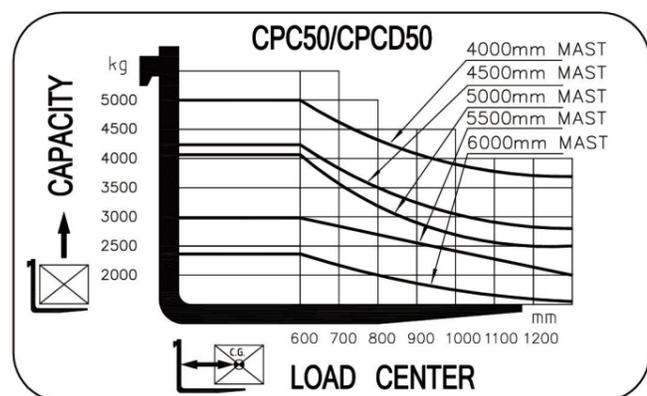


MODEL 型号		CPCD45	CPCD50	CPCD50L	CPCD60	CPCD70	CPCD80	CPCD100			
CHARACTERISTICS 特性	POWER动力形式	DIESEL 柴油									
	CAPACITY额定负载	kg 千克	4500	5000	5000	6000	7000	8000	10000		
	LOAD CENTER 载荷中心	mm 毫米	500	500	600	600	600	600	600		
	LIFT HEIGHT起升高度	mm 毫米	3000	3000	3000	3000	3000	3000	3000		
	MIN. TURNING RADIUS 最小转弯半径 (内侧)	mm 毫米	2620	2800	3240	3300	3370	3620	3650		
PERFORMANCE 性能	MAX. TRAVELING SPEED 最大行驶速度	LOAD/NO LOAD 满载/空载	km/h 千米/小时	24	22	26/28	26/28	26/28	25/27	25/27	
	MAX. LIFTING SPEED 最大起升速度	LOAD/NO LOAD 满载/空载	mm/s	420	460	500/530	500/530	500/530	450/480	340/360	
DIMENSIONS 尺寸	TOTAL LENGTH 全长	WITH FORK 有货叉	mm 毫米	4120	4209	4690	4730	4780	5050	5497	
		WITHOUT FORK 无货叉	mm 毫米	3050	3139	3510	3560	3600	3830	4277	
	TOTAL WIDTH 全宽		mm 毫米	1400	1480	1970	1970	1970	2100	2245	
	MAX. HEIGHT 货叉最大起升时高度		mm 毫米	4220	4200	4400	4400	4400	4400	4400	
MAST HEIGHT 门架落地高度		mm 毫米	2370	2270	2450	2450	2450	2870	2870		
CHASSIS 底盘	TYRE 轮胎	FRONT 前轮		300-15	300-15	8.25-15NHS	8.25-15NHS	8.25-15NHS	8.25-20NHS	9.00-20NHS	
		REAR 后轮		700-12	7.00-12	8.25-15NHS	8.25-15NHS	8.25-15NHS	8.25-20NHS	9.00-20NHS	
	WHEELBASE 轴距		mm 毫米	1900	2000	2250	2250	2250	2500	2800	
SERVICE WEIGHT 自重	NO LOAD 无载荷	kg 千克	5860	7100	8200	8900	9600	10800	12410		
POWER 驱动	ENGINE 引擎	BATTERY 电池	VOLTAGE/CAPACITY V/Ah 伏/安时	12/80	2*12/80	2*12/80	2*12/80	2*12/80	2*12/80	2*12/80	
		MODEL 型号		XINCHAI A498BPG	XINCHAI 4D35	XICHA1 6110 錫柴6110					
		RATED POWER 额定功率	kw/r.p.m 千瓦/转	45/2500	60/2200	83/2000					
		RATED TORQUE 额定转矩	Nm/r.p.m 牛米/转	193/1600-1800	300/1600	465/1300-1500					
		CYLINDERS 油缸数		4	4	6					

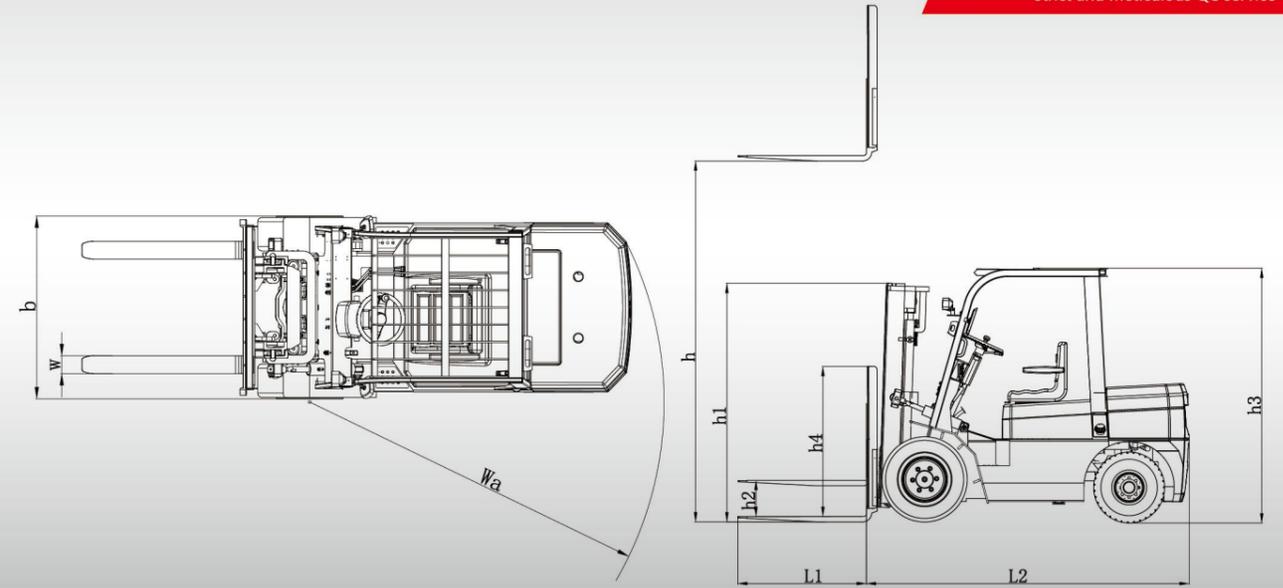

内燃叉车-柴油-T系列2.0-4.0吨
IC FORKLIFT-DIESEL-T SERIES 2.0-4.0T

标配豪华覆盖件，操作便利，
功能齐全，人性化设计理念丰富。

The standard luxury covering pieces, convenient operation, comprehensive functions, and humanized design concept are abundant.

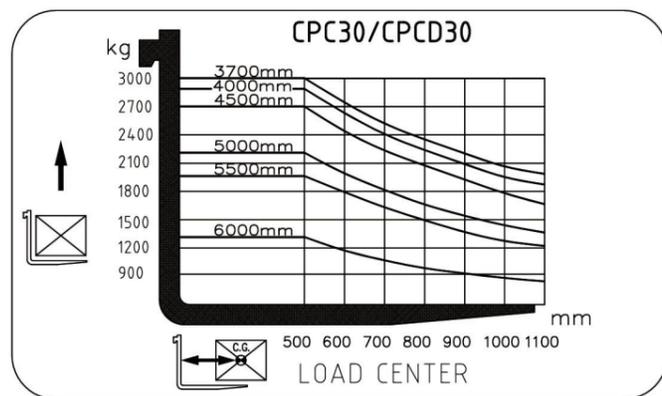

		MODEL 型号		CPCD20	CPCD25	CPCD30	CPCD35	CPCD40
CHARACTERISTICS 特性	POWER 动力形式			DIESEL 柴油				
	CAPACITY 额定负载		kg	2000	2500	3000	3500	4000
	LOAD CENTER 载荷中心		mm	500	500	500	500	500
	LIFT HEIGHT 起升高度		h mm	3000	3000	3000	3000	3000
	MAST TILT ANGLE 门架倾斜角度	F/R	Deg	6/12	6/12	6/12	6/12	6/12
	MIN. TURNING RADIUS 最小转弯半径		Wa mm	2240	2240	2445	2495	2530
	OVERHEAD GUARD HEIGHT 护顶架高度		mm	2145	2145	2160	2160	2170
	FRONT LOAD DISTANCE 前载距离		mm	450	450	490	490	490
PERFORMANCE 性能	MAX. TRAVELING SPEED 最大行驶速度	LOAD/NO LOAD 满载/空载	km/h	18/19	18/19	18/19	18/19	17/18
	MAX. LIFTING SPEED 最大起升速度	LOAD/NO LOAD 满载/空载	mm/s	475/500	475/500	455/480	455/480	425/450
	MAX. GRADEABILITY 最大爬坡能力	LOAD/NO LOAD 满载/空载	%	20/21	20/21	20/21	19/20	18/19
DIMENSIONS 尺寸	TOTAL LENGTH 全长	WITH FORK 有货叉	L1+L2 mm	3810	3810	3775	3820	3920
		WITHOUT FORK 无货叉	L2 mm	2650	2650	2700	2750	2850
	TOTAL WIDTH 全宽		b mm	1160	1160	1225	1225	1250
	MAX. HEIGHT 货叉架最大起升时高度	BACKREST 挡货架	h4 mm	4220	4220	4265	4265	4275
	MAST HEIGHT 门架落地高度		h mm	3000	3000	3000	3000	3000
CHASSIS 底盘	TYRE 轮胎	FRONT 前轮		7.00-12-12PR	7.00-12-12PR	28x9-15-12PR	28x9-15-12PR	250-15-16PR
		REAR 后轮		6.00-9-10PR	6.00-9-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR
	WHEELBASE 轴距		L2 mm	1600	1600	1700	1700	1800
	WHEELTREAD 轮距	F/R 前/后	mm	970/970	970/970	970/970	1000/970	1000/970
	SERVICE WEIGHT 自重	NO LOAD 无载荷	Kg	3550	3750	4380	4680	4950
BATTERY 电池	VOLTAGE/CAPACITY 电压/电容量	V/Ah	12/80	12/80	12/80	12/80	12/80	
POWER 驱动	ENGINE 引擎	MODEL 型号		ISUZU C240	ISUZU C240	ISUZU C240	ISUZU C240	ISUZU 4JG2
		RATED POWER 额定功率	kw/r.p.m	35.4/2500	35.4/2500	35.4/2500	35.4/2501	46/2450
		RATED TORQUE 额定转矩	Nm/r.p.m	138/1800	160/1800	138/1800	138/1800	186/1800
		CYLINDERS 缸数		4	4	4	4	4