



内燃叉车-汽油/LPG-C系列2.0-4.0吨
IC FORKLIFT-GASOLINE/LPG-C SERIES 2.0-4.0T

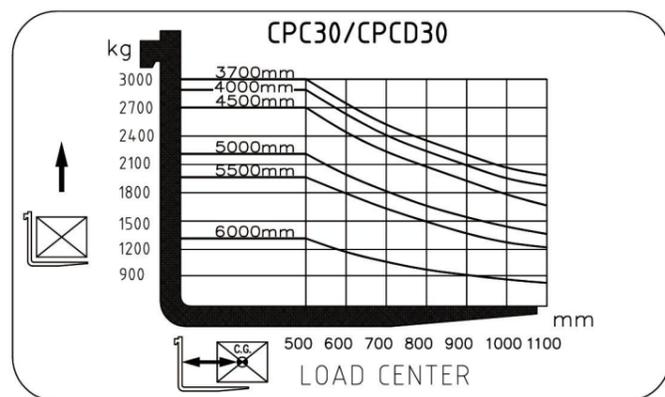

简单可靠的减震设计,
更安全、更稳定。

Simple and reliable shock
absorption design for safer
and more stable performance.

Model 型号		CPCD20	CPCD25	CPCD30	CPCD35	CPCD40			
CHARACTERISTICS 特性	POWER 动力形式	GASOLINE/LPG 汽油/液化石油气							
	CAPACITY 额定负载	kg	2000	2500	3000	3500	4000		
	LOAD CENTER 载荷中心	mm	500	500	500	500	500		
	LIFT HEIGHT 起升高度	h	mm	3000	3000	3000	3000	3000	
	MAST TILT ANGLE 门架倾斜角度	F/R 前/后	Deg	6/12	6/12	6/12	6/12	6/12	
	MIN. TURNING RADIUS 最小转弯半径	Wa	mm	2410	2410	2450	2450	2850	
	OVERHEAD GUARD HEIGHT 护顶架高度		mm	2150	2150	2165	2165	2165	
	FRONT LOAD DISTANCE 前载距离		mm	450	450	490	490	495	
PERFORMANCE 性能	MAX. TRAVELING SPEED 最大行驶速度	LOAD/NO LOAD 满载/空载	km/h	18/19	18/19	18/19	18/19	17/18	
	MAX. LIFTING SPEED 最大起升速度	LOAD/NO LOAD 满载/空载	mm/s	475/500	475/500	455/480	455/480	425/450	
	MAX. GRADEABILITY 最大爬坡能力	LOAD/NO LOAD 满载/空载	%	20/21	20/21	20/21	19/20	18/19	
DIMENSIONS 尺寸	TOTAL LENGTH 全长	WITH FORK 有货叉	L1+L2	mm	3750	3750	3770	3770	4055
		WITHOUT FORK 无货叉	L2	mm	2680	2680	2700	2700	2985
	TOTAL WIDTH 全宽		b	mm	1160	1160	1225	1225	1360
	MAX. HEIGHT 货叉架最大起升时高度	BACKREST 挡货架	h4	mm	4245	4245	4265	4265	4315
	MAST HEIGHT 门架落地高度		h1	mm	2085	2085	2100	2100	2195
CHASSIS 底盘	TYRE 轮胎	FRONT 前轮			7.00-12-12PR	7.00-12-12PR	28x9-15-12PR	28x9-15-12PR	250-15-20PR
		REAR 后轮			6.00-9-10PR	6.00-9-10PR	6.50-10-10PR	6.50-10-10PR	7.00-12-12PR
	WHEELBASE 轴距		L3	mm	1700	1700	1700	1700	1860
	WHEELTREAD 轮距	F/R 前/后		mm	970/970	970/970	970/970	1000/970	1154/1100
SERVICE WEIGHT 自重	NO LOAD 无载荷		Kg	3600	3850	4300	4600	5100	
BATTERY 电池	VOLTAGE/CAPACITY 电压/容量		V/Ah	12/80	12/80	12/80	12/80	12/80	
POWER 驱动	ENGINE 引擎	MODEL 型号		GK25					
		RATED POWER 额定功率		kw/r.p.m	37.4/2300	37.4/2300	37.4/2300	37.4/2300	37.4/2300
		RATED TORQUE 额定转矩		Nm/r.p.m	176.5/1600	176.5/1600	176.5/1600	176.5/1600	176.5/1600
		CYLINDERS 油缸数			4	4	4	4	4

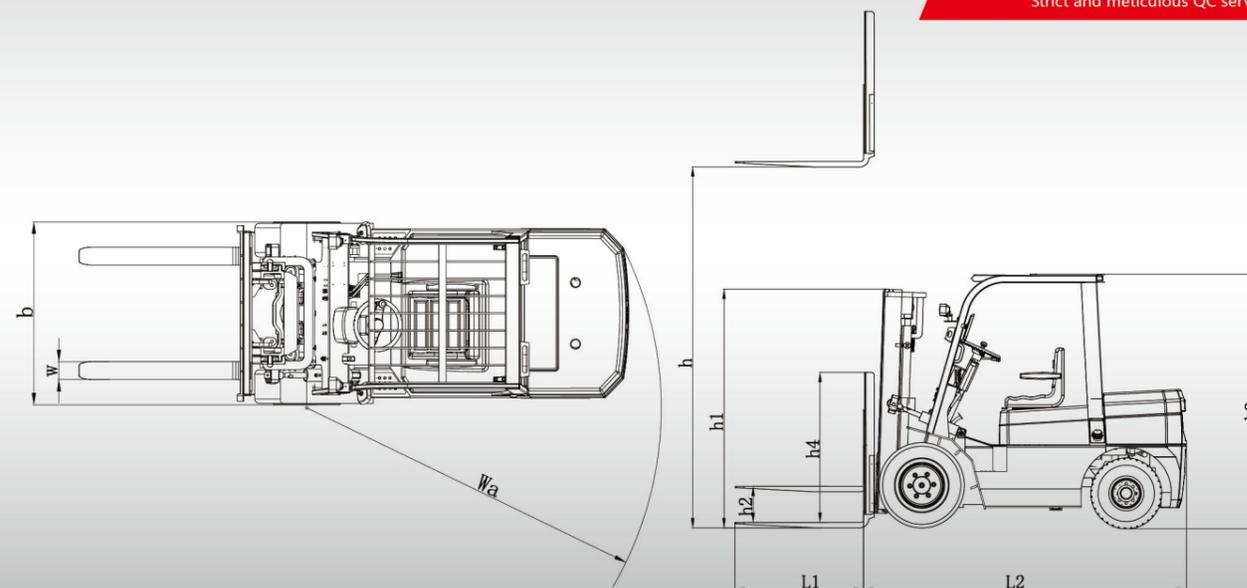


内燃叉车-汽油/LPG-K系列1.5-4.0吨


IC FORKLIFT-GASOLINE/LPG-K SERIES 1.5-4.0T

新型方向盘调整机构，
提高了操作舒适性和调整可靠性。

New steering wheel
adjustment mechanism
improves comfort and
reliability of operation.

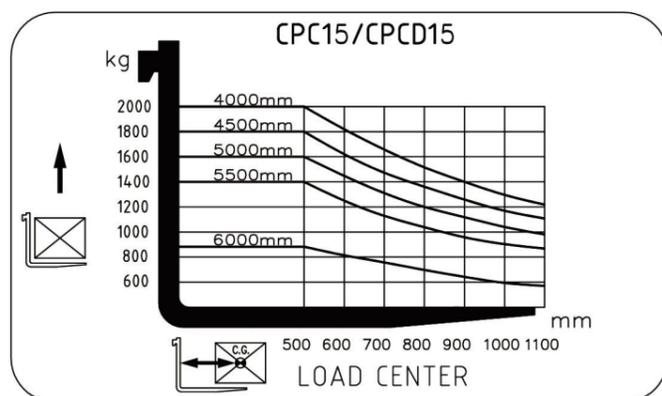


Model 型号		CPCD15	CPCD20	CPCD25	CPCD30	CPCD30H	CPCD35	CPCD40			
CHARACTERISTIC 特性	POWER动力形式				GASOLINE/LPG 汽油/液化石油气						
	CAPACITY额定负载				1500	2000	2500	3000	3300	3500	4000
	LOAD CENTER 载荷中心				500	500	500	500	500	500	500
	LIFT HEIGHT起升高度				3000	3000	3000	3000	3000	3000	3000
	MAST TILT ANGLE 门架倾斜角度	F/R			6/12	6/12	6/12	6/12	6/12	6/12	6/12
	MIN. TURNING RADIUS 最小转弯半径		Wa		2060	2190	2240	2400	2470	2470	2580
	OVERHEAD GUARD HEIGHT 护顶架高度				2100	2150	2150	2165	2165	2165	2180
	FRONT LOAD DISTANCE 前载距离				410	450	450	490	490	490	490
PERFORMANCE 性能	MAX TRAVELING SPEED 最大行驶速度	LOAD/NO LOAD 满载/空载		km/h 千米/小时	17/18	18/19	18/19	18/19	18/19	18/19	18/19
	MAX LIFTING SPEED 最大起升速度	LOAD/NO LOAD 满载/空载		mm/s 毫米/秒	550/600	480/500	480/500	450/480	450/480	450/480	420/450
	MAX. GRADEABILITY 最大爬坡能力	LOAD/NO LOAD 满载/空载		%	20/21	20/21	20/21	20/21	19/20	18/19	18/19
DIMENSIONS 尺寸	TOTAL LENGTH 全长	WITH FORK有货叉	L1+L2	mm 毫米	3340	3600	3650	3770	3870	3870	3970
		WITHOUT FORK无货叉	L2	mm 毫米	2270	2530	2580	2700	2800	2800	2900
	TOTAL WIDTH 全宽		b	mm 毫米	1080	1160	1160	1225	1225	1225	1250
	MAX. HEIGHT 货叉最大起升高度		h4	mm 毫米	3930	4220	4220	4265	4265	4265	4275
MAST HEIGHT 门架落地高度		h	mm 毫米	2000	2100	2100	2115	2115	2115	2195	
CHASSIS 底盘	TYRE 轮胎	FRONT 前轮			6.50-10	7.00-12	7.00-12	28x9-15	28x9-15	28x9-15	250-15
		REAR 后轮			5.00-8	6.00-9	6.00-9	6.50-10	6.50-10	6.50-10	6.50-10
	WHEELBASE 轴距		L3	mm 毫米	1400	1600	1600	1700	1800	1800	1900
	F/R WHEELTREAD 前轮距/后轮距		F/R	mm 毫米	890/920	970/970	970/970	1000/970	1000/970	1000/970	1000/970
SERVICE WEIGHT 自重	NO LOAD无载荷		kg 千克	2760	3530	3850	4350	4300	4605	4605	
BATTERY 电池	VOLTAGE/CAPACITY 电压/容量		V/Ah 伏/安时	12/80	12/80	12/80	12/80	12/80	12/80	12/80	
POWER 驱动	ENGINE 引擎	MODEL 型号			GK21	GK25	GK25	GK25	GK25	GK25	GK25
		RATED POWER 额定功率		kw/r.p.m 千瓦/转	31.2/2250	37.4/2300	37.4/2300	37.4/2300	37.4/2300	37.4/2300	37.4/2300
		RATED TORQUE 额定转矩		Nm/r.p.m 牛米/转	143.7/1600	176.5/1600	176.5/1600	176.5/1600	176.5/1600	176.5/1600	176.5/1600
		CYLINDERS 缸数			4	4	4	4	4	4	4

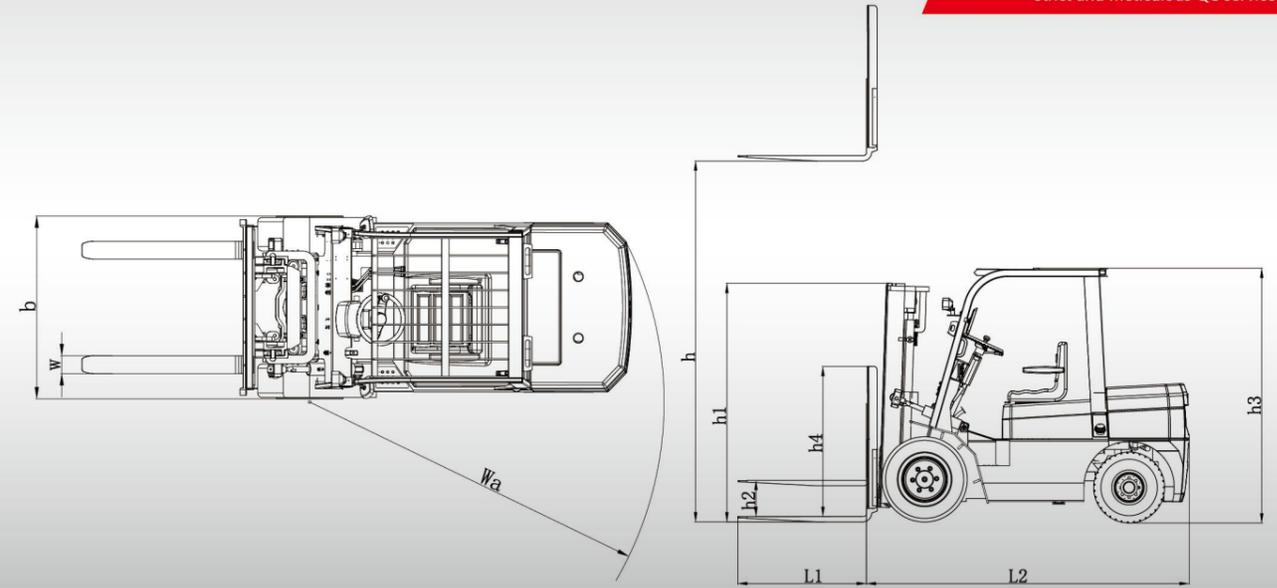

内燃叉车-汽油/LPG-T系列2.0-4.0吨
IC FORKLIFT-GASOLINE/LPG-T SERIES 2.0-4.0T

超宽台阶，进出更方便。
安全踏板具有更大的脚部空间，
可在上下车时提高舒适度并减少疲劳。

Wide steps for easier access
and a safety platform with
spacious foot space for
increased comfort and
reduced fatigue while
boarding and alighting.

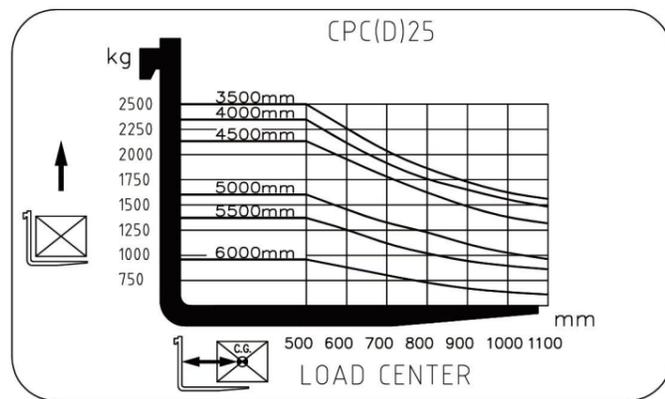

MODEL 型号		CPCD20	CPCD25	CPCD30	CPCD35	CPCD40			
CHARACTERISTICS 特性	POWER 动力形式	GASOLINE/LPG 汽油/液化石油气							
	CAPACITY 额定负载	kg	2000	2500	3000	3500	4000		
	LOAD CENTER 载荷中心	mm	500	500	500	500	500		
	LIFT HEIGHT 起升高度	h	mm	3000	3000	3000	3000		
	MAST TILT ANGLE 门架倾斜角度	F/R	Deg	6/12	6/12	6/12	6/12		
	MIN. TURNING RADIUS 最小转弯半径	Wa	mm	2240	2240	2445	2495	2530	
	OVERHEAD GUARD HEIGHT 护顶架高度		mm	2145	2145	2160	2160	2170	
	FRONT LOAD DISTANCE 前载距离		mm	450	450	490	490	490	
PERFORMANCE 性能	MAX. TRAVELING SPEED 最大行驶速度	LOAD/NO LOAD 满载/空载	km/h	18/19	18/19	18/19	18/19	17/18	
	MAX. LIFTING SPEED 最大起升速度	LOAD/NO LOAD 满载/空载	mm/s	475/500	475/500	455/480	455/480	425/450	
	MAX. GRADEABILITY 最大爬坡能力	LOAD/NO LOAD 满载/空载	%	20/21	20/21	20/21	19/20	18/19	
DIMENSIONS 尺寸	TOTAL LENGTH 全长	WITH FORK 有货叉 L1+L2	mm	3810	3810	3775	3820	3920	
		WITHOUT FORK 无货叉 L2	mm	2650	2650	2700	2750	2850	
	TOTAL WIDTH 全宽		b	mm	1160	1160	1225	1225	1250
	MAX. HEIGHT 货叉架最大起升高度	BACKREST 挡货架	h4	mm	4220	4220	4265	4265	4275
	MAST HEIGHT 门架落地高度	h	mm	3000	3000	3000	3000	3000	
CHASSIS 底盘	TYRE 轮胎	FRONT 前轮		7.00-12-12PR	7.00-12-12PR	28x9-15-12PR	28x9-15-12PR	250-15-16PR	
		REAR 后轮		6.00-9-10PR	6.00-9-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	
	WHEELBASE 轴距	L2	mm	1600	1600	1700	1700	1800	
	WHEELTREAD 轮距	F/R 前/后	mm	970/970	970/970	970/970	1000/970	1000/970	
	SERVICE WEIGHT 自重	NO LOAD 无载荷	Kg	3550	3750	4380	4680	4950	
POWER 驱动	BATTERY 电池	VOLTAGE/CAPACITY 电压/电容量	V/Ah	12/80	12/80	12/80	12/80	12/80	
		MODEL 型号		GK25					
		RATED POWER 额定功率	kw/r.p.m	35.4/2300	35.4/2300	35.4/2300	35.4/2300	35.4/2300	
		RATED TORQUE 额定转矩	Nm/r.p.m	176.5/1600	176.5/1600	176.5/1600	176.5/1600	176.5/1600	
		CYLINDERS 油缸数		4	4	4	4	4	