



两驱越野叉车-S系列2.5-4.0吨
ROUGH TERRAIN FORKLIFT 2WD
-S SERIES 2.5-4.0T

宽敞的离地间隙和优化的尺寸，
可在恶劣地形下提供出色的机
动性和稳定性。

With spacious ground clearance and optimized dimensions, it offers exceptional maneuverability and stability even in challenging terrain.

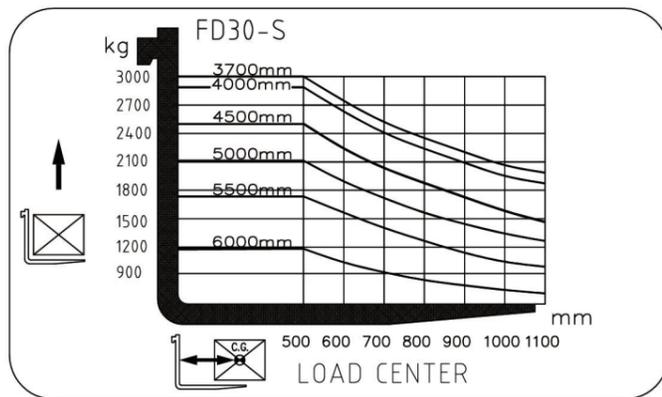

MODEL型号		FD25-S	FD30-S	FD35-S	FD40-S			
CHARACTERISTICS 特性	POWER动力形式	内燃 DIESEL						
	CAPACITY额定负载	kg	2500	3000	3500	4000		
	LOAD CENTER载荷中心	mm	500	500	500	500		
	LIFT HEIGHT起升高度	h	mm	3000	3000	3000	3000	
	MAST TILT ANGLE门架倾斜角度	F/R前/后	Deg	8/12	8/12	8/12	8/12	
	MIN. TURNING RADIUS最小转弯半径	Wa	mm	2910	2910	2910	2960	
	MIN. GROUND CLEARANCE最小离地间隙	MAST门架	mm	250	250	250	250	
		FRAME车架	mm	310	310	310	355	
	OVERHEAD GUARD HEIGHT护顶架高度	h3	mm	2220	2220	2220	2265	
FRONT LOAD DISTANCE前载距离		mm	450	450	450	490		
PERFORMANCE 性能	TRAVEL SPEED最大行驶速度	LOAD满载	km/h	22	22	22	22	
	LIFT SPEED最大起升速度	LOAD满载	mm/s	450	440	420	420	
	MAX. GRADEABILITY最大爬坡度	LOAD	%	16	16	16	16	
CHARACTERISTICS 尺寸	TOTAL LENGTH全长	WITHOUT FORK无货叉	L2	mm	2960	2960	2960	3000
	TOTAL WIDTH全宽		b	mm	1550	1550	1550	1650
	MAX HEIGHT货叉最大起升时高度(挡货架)		h4	mm	4350	4350	4350	4350
	MAST HEIGHT门架未落地高度		h1	mm	2230	2230	2230	2300
CHASSIS 底盘	TYRE轮胎	FRONT前轮			12-16.5-14PR	12-16.5-14PR	12-16.5-14PR	14-17.5-16PR
					27x10.5-15PR	27x10.5-15PR	27x10.5-15PR	10-16.5-12PR
	WHEELBASE轴距	L3	mm	1850	1850	1850	1850	
	WHEEL TREAD前轮距/后轮距	F/R前后	mm	1250/1205	1250/1205	1250/1205	1300/1205	
SERVICE WEIGHT自重	WITHOUT LOAD无载荷	Kg	4650	4800	4950	5200		
POWER 驱动	BATTERY电池	VOLTAGE电压 /CAPACITY容量	V/Ah	12/80	12/80	12/80	12/80	
	ENGINE引擎	MODEL型号		XINCHAI C495BPG	XINCHAI C495BPG	XINCHAI A498BPG	XINCHAI A498BPG	
		POWER额定功率	kw/r	42KW/2650r/min	42KW/2650r/min	45KW/2500/min	45KW/2500/min	
RATED TORQUE额定转矩	Nm/r	174N.m/1800-2000r/min	174N.m/1800-2000r/min	193N.m/1600-1800r/min	193N.m/1600-1800r/min			

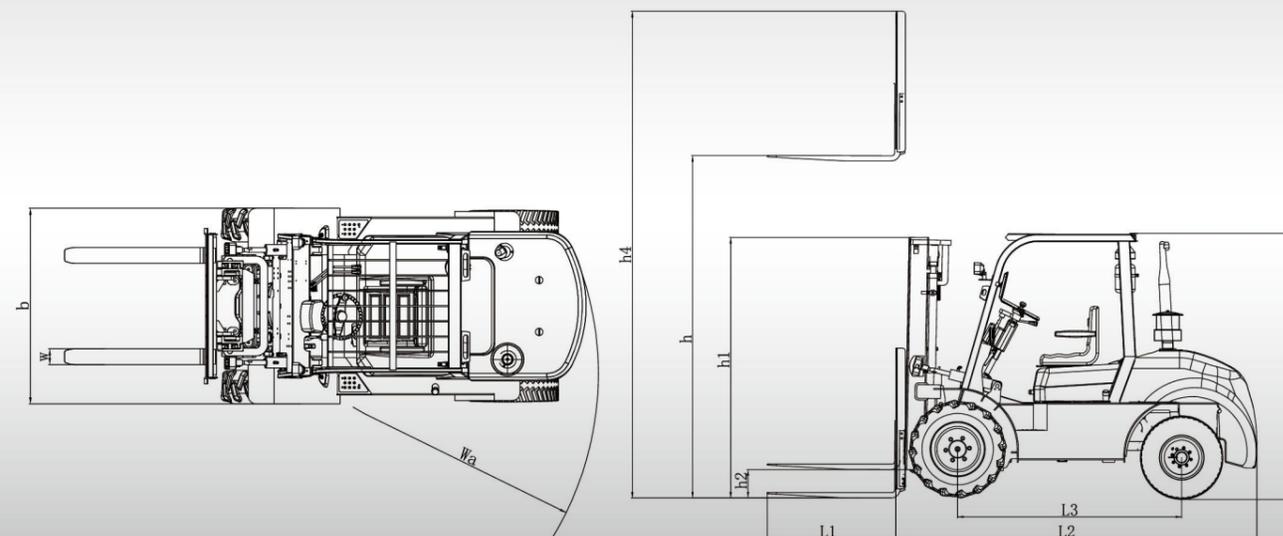


四驱越野车-F系列3.0-4.0吨

ROUGH TERRAIN FORKLIFT 4WD
-F SERIES 3.0-4.0T

全新设计的越野叉车，为可用在矿山、农场、机场、码头、车站等路况条件较复杂的室外地形来装卸物资。

Newly designed off-road forklift for efficient material handling in complex outdoor terrain, such as mines, farms, airports, ports, and stations.

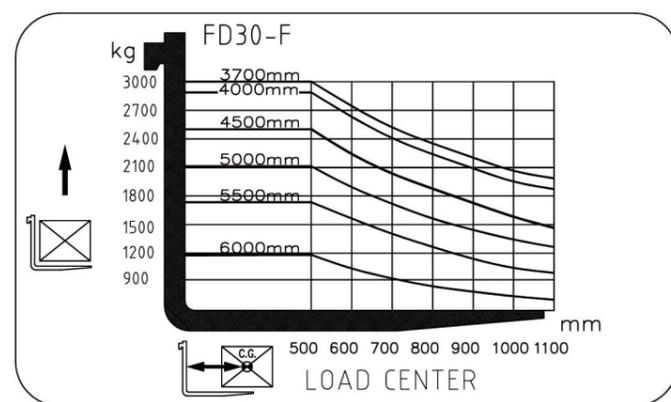

		MODEL 型号			FD25-F	FD30-F	FD35-F	FD40-F
CHARACTERISTICS 特性	POWER 动力形式				DIESEL 柴油			
	CAPACITY 额定负载			kg	2500	3000	3500	4000
	LOAD CENTER 载荷中心			mm	500	500	500	500
	LIFT HEIGHT 起升高度		h	mm	3000	3000	3000	3000
	MIN.TURNING RADIUS 最小转弯半径		Wa	mm	3120	3120	3120	3120
PERFORMANCE 性能	MAX.TRAVELING SPEED 最大行驶速度	LOAD 满载		km/h	20	20	20	20
	MAX.LIFTING SPEED 最大起升速度	LOAD 满载		mm/s	530	530	480	480
	MAX. GRADEABILITY 最大爬坡度	LOAD 满载		%	30	30	30	30
DIMENSION 尺寸	TOTAL LENGTH 全长	WITH FORK 有货叉	L1+L2	mm	4135	4135	4135	4135
		WITHOUT FORK 无货叉	h1	mm	3065	3065	3065	3065
	TOTAL WIDTH 全宽		b	mm	1450	1600	1600	1600
	MAX HEIGHT 货叉最大起升时高度		h4	mm	4350	4350	4350	4350
	MAST HEIGHT 门架落地高度		h1	mm	2235	2235	2235	2280
CHASSIS 底盘	TYRE 轮胎	FRONT 前轮			14-17.5-14PR	14-17.5-14PR	14-17.5-14PR	14-17.5-14PR
		REAR 后轮			10.0/75-15.3	10.0/75-15.3	10.0/75-15.3	10.0/75-15.3
	WHEELBASE 轴距		L3	mm	1880	1880	1880	1880
SERVICE WEIGHT 自重	WITHOUT LOAD 无载荷		Kg	5050	5250	5545	5800	
STORAGE BATTERY 蓄电池	VOLTAGE电压 /CAPACITY容量		V/Ah	12/80	12/80	12/80	12/80	
POWER 驱动	ENGINE 引擎	MODEL 型号			XINCHAI A498BPG	XINCHAI A498BPG	XINCHAI A498BPG	XINCHAI A498BPG
		POWER 额定功率		Kw/r	45/2500	45/2500	45/2500	45/2500
		RATED TORQUE 额定转矩		Nm/r.p.m	193/1600-1800	193/1600-1800	193/1600-1800	193/1600-1800